


Polyester self-closing wrap




JDD-SCP self-closing wrap is woven by flammability class UL 94 V0 polyester monofilament. It provides excellent flame resistance, heat dispersion and durable protection. The special open structure provides easy removal when is necessary an inspection or maintance of wire harnesses.

Application

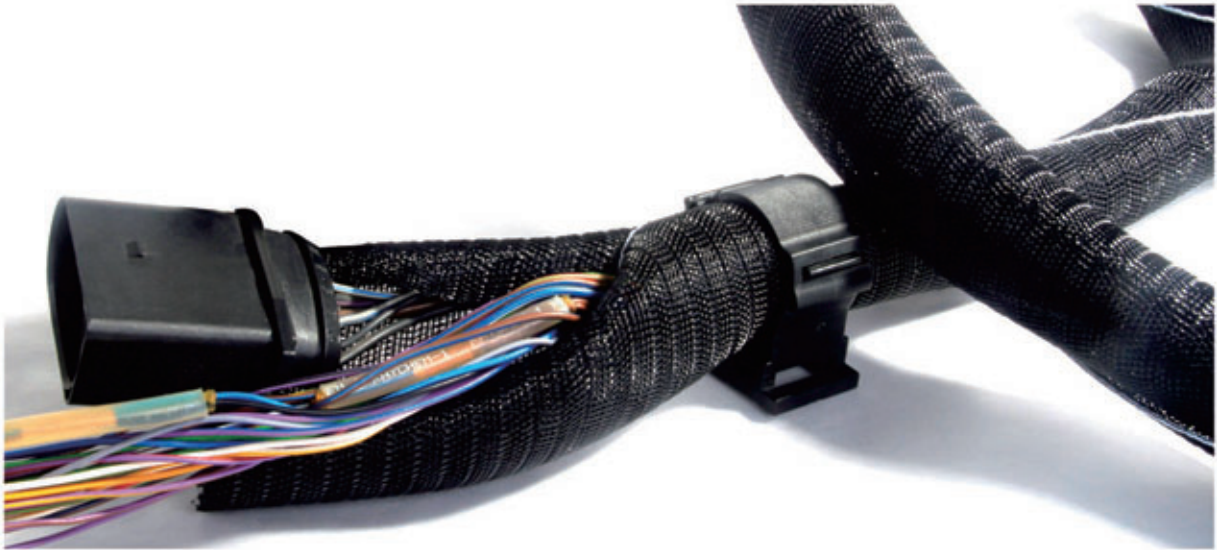

Drawing

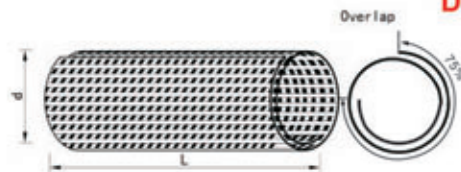

Most commonly used in railways and automotive where the wire harnesses and hoses need high flame retardant ,heat dispersion and durable protection.

Datasheet

Part No.	I.D (I)	Overlap (%)	Max. bundle Dia.	Packing(L)
SCP-005	5	75%	6	100 m/spool
SCP-008	8		9	100 m/spool
SCP-013	13		14	100 m/spool
SCP-019	19		20	50 m/spool
SCP-025	25		26	25 m/spool
SCP-029	29		30	25 m/spool
SCP-038	38		40	25 m/spool

Unit: mm

Technical data

Material	Polyester
Operating range	-50°C - +150°C
Melt point	240±10°C
Flammability	DIN5510,VW-1
Standard color	Black
Certificate	RoHS, Halogen Free
Cutting tool	Hot knife Scissors



Notes:

- 1.The part No. will be followed by BK, GR and so on to indicate the color of wrap.
- 2.Special packages, sizes and colors can be supplied upon request.
- 3.All numerical data shows average or typical values, not including customized sizes.